

WOOD CHIPPER

BRANCH LOGGER

TR 系列断木机

The TR Series Branch logger is mounted on the rear three-point hitch on the tractor.

The cutting knives feed the branch itself when the machine is running.

Logs then fall into a bag mounted on bags-filling device.


There is a trailer pin included or you can choose optional trailer ball

The minimum recommended tractor HP is 20HP

There equips six alloy steel blades and can be re-sharpened

The result of log length is between 70mm to 220mm

For small branches, you may feed in more of them in at a time.

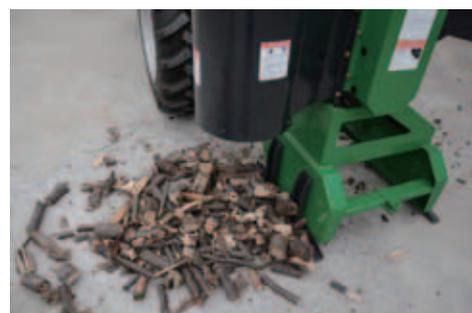

Model	TR75	TR110
Max Diameter of Branches	75mm	110mm
Length of Chips	50-200 mm	70-220 mm
Hopper Inlet(WxH)	550x600 mm	600x600 mm
Number of Knives	6	6
Mounting System	3 Point Hitch, CAT-I	3 Point Hitch, CAT-I& II
Structure Weight	115 KG	260 KG
Tractor HP	Min 18HP	Min 20HP